

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number
WO 2005/056251 A1

(51) International Patent Classification⁷: **B26B 21/34**,
21/22

(21) International Application Number:
PCT/IB2004/052707

(22) International Filing Date: 8 December 2004 (08.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03104612.1 10 December 2003 (10.12.2003) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HOUBOLT, Erik** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HAMBURG, Marco, C.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HOEXUM, Everhardus, J.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **PAAUW, Hendrik, K.** [NL/NL]; c/o

Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **WESSELING, Mark** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **AKKERMAN, Hette** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agents: **WOLFS, Marc, J., M.** et al.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: SHAVING HEAD WITH SKIN STRETCHING MEMBER

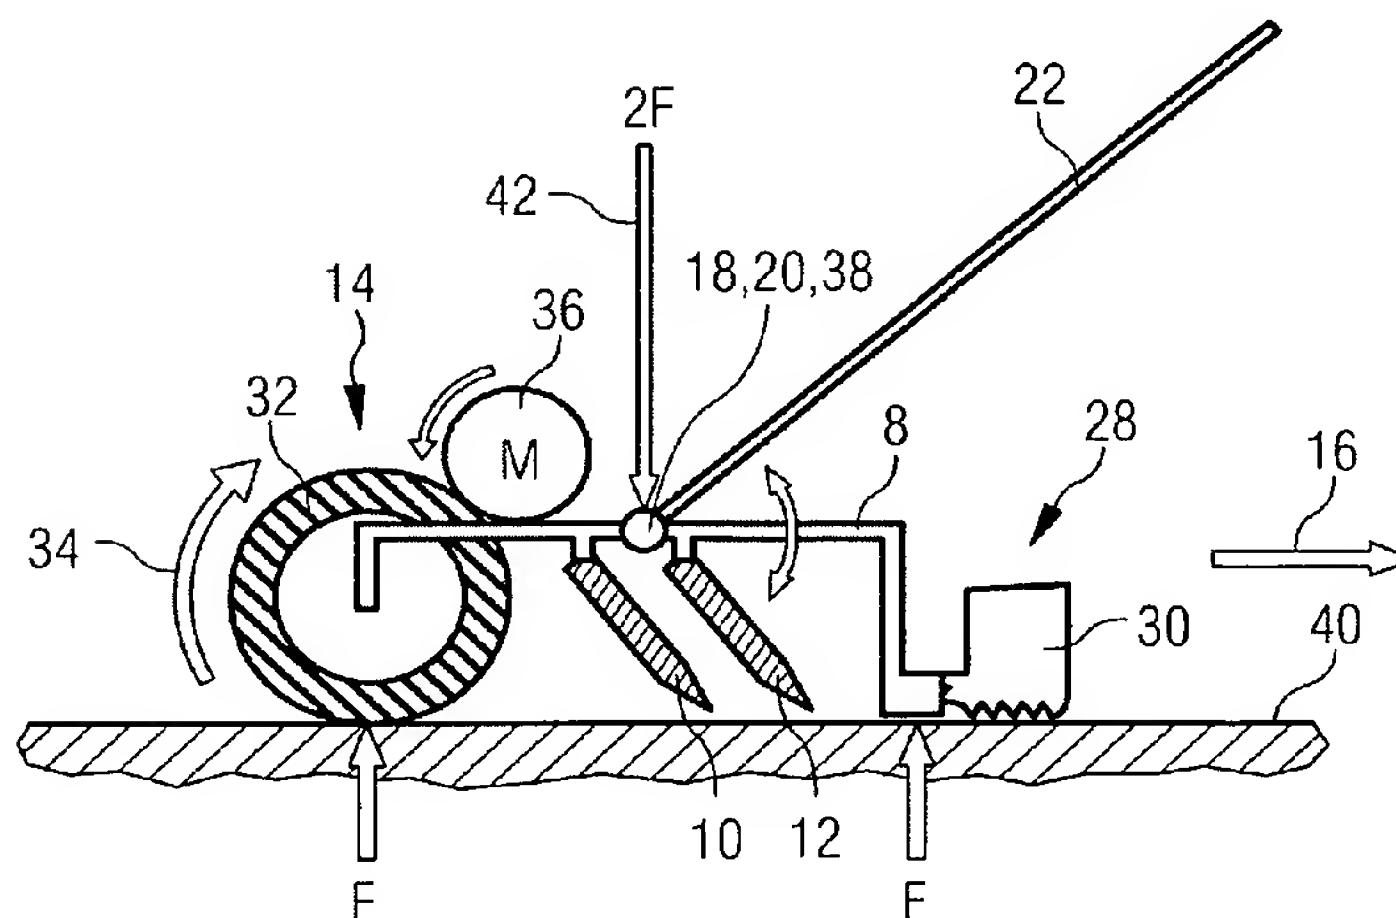

(57) Abstract: The invention is directed to a shaving head (8) comprising at least one cutting blade (10, 12) and actively driveable skin stretching means (14) arranged behind said cutting blade (10, 12) relative to a cutting direction (16) of said cutting blade (10, 12). The actively driveable skin stretching means (14) are provided to reduce the possibility that nicks and cuts or irritations of the skin to be shaved are created during the shaving operation. In accordance with the invention the shaving head (8) comprises means (18) for providing a pivot axis (20) between the shaving head (8) and a handle (22) attached or attachable to said shaving head (8), said pivot axis (20) being arranged at least essentially parallel to said cutting blade (10, 12). By providing the pivot axis (20) the force ratio between a force applied to the actively driveable skin stretching means (14) and forces applied to other parts of the shaving head (8) may be kept constant for different angles of the handle. This improves the functioning of the actively driveable skin stretching means (14).



FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,*

ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Shaving head with skin stretching member

The present invention relates to a shaving head comprising at least one cutting blade and actively driveable skin stretching means arranged behind said cutting blade relative to a cutting direction of said cutting blade.

5

A shaving head of the type mentioned above is well known in the art. Such a shaving head is also known as a safety razor. A problem that still occurs in connection with the known safety razors is the possibility that nicks and cuts or irritations of the skin to be shaved are created during the shaving operation.

10

This problem can at least be reduced by providing skin stretching means, for example in the form of a driven roller, behind the cutting blade. Such a solution is known from DE19514228A1. This document discloses a razor having a shaving head of the above mentioned type, wherein a first roller is provided in front of the cutting blades and a second roller is provided behind the cutting blades. The first roller is driven by moving the shaving head over the skin. Furthermore, the first roller and the second roller are coupled by a gear wheel such that the second roller is driven to rotate faster than the first roller to provide the skin stretching effect. However, with the solution known from DE19514228A1 the desired skin stretching effect is achieved, only if the person using the razor properly inclines the handle, and thereby the shaving head, such that both the first and the second roller properly contact the skin to be shaved. This is not possible in all conditions of use.

15

20

It is an object of the invention to improve a shaving head of the above mentioned type such that the skin stretching effect is obtained under all conditions of use.

25

In order to achieve this object, a shaving head in accordance with the invention is characterized in that it comprises means for providing a pivot axis between the shaving head and a handle attached or attachable to said shaving head, said pivot axis being arranged at least essentially parallel to said cutting blade. Contrary to known razors having pivotable shaving heads to optimize the shaving angle, the solution in accordance with the present invention provides a pivot axis which ensures that the actively driveable skin stretching means properly

30

contact the skin to be shaved, under all conditions of use and at different handle angles.

Furthermore, by the pivot axis there is provided a constant force ratio between a pressure force applied to the skin stretching means and pressure forces applied to other parts of the shaving head, especially a pressure force applied to guard means discussed in detail below. This constant
5 force ratio results in a more constant driving force of the skin stretching means on the shaving head, and thereby control of the razor during shaving is improved. Stretching the skin behind the cutting blade under all conditions of use stiffens the hair anchoring and raises the hairs. A stiffer hair anchoring and raised hairs enlarge the chance of cutting the hairs, reduce pulling on hairs and give a cleaner cut. Furthermore, stretching the skin reduces skin doming in front of the cutting
10 blade and improves the force balance between the cutting blade and the skin. This leads to improved safety and comfort. The means for providing the pivot axis may be realized by any suitable solution known in the art, especially by a hinge, an integral hinge, a coupling mechanism also used to couple the shaving head to the handle, or snap-in hooks.

A particular embodiment of a shaving head in accordance with the invention is
15 characterized in that between said shaving head and said handle, when attached to the shaving head, there is provided at least one spring element. The spring element preferably is arranged to limit the pressure the user exerts on the skin to be shaved. The spring element may form a part of the handle and/or it may connect a section of the handle to the shaving head.

A particular embodiment of a shaving head in accordance with the invention
20 further comprises guard means arranged in front of said cutting blade relative to said cutting direction of said cutting blade. The guard means may for example be realized by a further roller or by a gliding element, for example a gliding element having a rectangular cross section and comprising grooves in the surface intended for contact with the skin.

In a preferred embodiment of a shaving head in accordance with the invention
25 said guard means are adapted to perform a hair erecting function. If the hair is erected before it is cut by the cutting blade, a closer cut is obtained.

Additionally or alternatively it may be advantageous if said guard means are adapted to perform a lubricating function.

Furthermore, it is possible that said guard means comprise at least one strip
30 arranged parallel to said cutting blade.

In a preferred embodiment of a shaving head in accordance with the invention
said pivot axis is arranged such that a force component applied perpendicularly to said cutting direction during a shaving operation is distributed at least essentially in equal parts to said actively driveable skin stretching means and said guard means. At least in some cases this may be
35 effected by placing the pivot axis exactly in the middle between the actively driveable skin

stretching means and the guard means. In general the optimal position of the pivot axis depends on the friction between skin and guard means, the friction between skin and actively driveable skin stretching means as well as the traction of the actively driveable skin stretching means. In many cases the optimal position of the pivot axis lies between the above mentioned middle position and the guard means.

A preferred embodiment of a shaving head in accordance with the invention is characterized in that said pivot axis is arranged closer to said guard means than to said skin stretching means. In any case the force ratio between the force applied to the skin stretching means and the force applied to the guard means is kept at least essentially constant under all conditions of use, especially for different handle angles.

A particular embodiment of a shaving head in accordance with the invention is characterized in that said means for providing a pivot axis parallel to said cutting blade comprise first coupling means for coupling said shaving head to said handle. Such first coupling means are especially advantageous if for replacing the cutting blade the whole shaving head is replaced.

In a preferred embodiment of a shaving head in accordance with the invention said actively driveable skin stretching means comprise at least one actively driveable roller. This roller may be intended for direct contact with the skin. In other embodiments there may be provided a closed loop system, for example a closed loop web, supported by the actively driveable roller and at least a further roller.

In a preferred embodiment of a shaving head in accordance with the invention the sense of rotation of said roller, when active during a shaving operation, corresponds to its reeling sense of rotation relative to said cutting direction, and the rotational speed of the actively driven roller is higher than the rotational speed that would result from the movement of the shaving head. By virtue thereof an optimal skin stretching effect is obtained.

In accordance with one aspect of the invention said actively driveable skin stretching means are driven via a movement of the shaving head over skin to be shaved. For example a further roller or a wheel may be driven by moving the razor and the further roller or the wheel may drive the skin stretching means with a suitable gear ratio. Solutions similar to the one shown in DE19514228A1 may also be used.

In accordance with another aspect of the invention said actively driveable skin stretching means are driveable by an electromotor.

In a preferred embodiment said electromotor is associated with said shaving head. This makes sense particularly in cases where the cutting blade may be renewed separately from the shaving head.

In another preferred embodiment said electromotor is associated with said handle. This is especially advantageous if the whole shaving head is replaced for renewing the cutting blade.

Especially if the electromotor is associated with said handle, the shaving head
5 preferably further comprises second coupling means for coupling said skin stretching element to said electromotor. The second coupling means may for example take the form of two engaging gear wheels, one associated with the handle comprising the electromotor and the other associated with the shaving head.

10

The above and further aspects and advantages of the invention will be apparent from and elucidated with reference to the embodiments of the invention described hereinafter and shown in the drawings. In the drawings:

Fig. 1 is a simplified and schematic depiction of a first embodiment of a shaving
15 head in accordance with the invention;

Fig. 2 is a simplified and schematic depiction of a second embodiment of a shaving head in accordance with the invention;

Fig. 3 is a simplified and schematic depiction of a third embodiment of a shaving head in accordance with the invention; and

20 Fig. 4 is a simplified and schematic depiction of a fourth embodiment of a shaving head in accordance with the invention.

Fig. 1 is a simplified and schematic depiction of a first embodiment of the shaving
25 head 8 in accordance with the invention. The shaving head 8 is coupled to a handle 22 by first coupling means 38. The first coupling means 38 may for example take the form of one or more snap-in hooks provided at the shaving head 8 for snapping in in one or more respective bridges provided at the handle 22. The shaving head 8 comprises two cutting blades 10,12 arranged such that a cutting direction 16 results. Relative to the cutting direction 16, behind the cutting blades
30 10, 12 there are provided actively driveable skin stretching means 14. The actively driveable skin stretching means 14 comprise a roller 32 which may be driven by an electromotor 36 associated with the shaving head 8. The roller 32 is driven such that the sense of rotation 34 corresponds with the reeling sense of rotation 34 relative to the cutting direction 16. Relative to the cutting direction 16, in front of the cutting blades 10,12 there are provided guard means 28. The guard

means 28 comprise a strip 30 having a rectangular cross section in general and being provided with grooves in the surface intended for contact with skin 40 to be shaved.

During a shaving process, i.e. when a user moves the shaving head in the cutting direction 16, roller 32 is driven by the electromotor 36 to rotate in the sense of rotation 34 and with a rotational speed that is higher than the rotational speed that would result from the movement of the shaving head 8 over the skin 40. To ensure the optimal pressure force F for the roller 32 and the guard means 28, there are provided means 18 for providing a pivot axis 20 between the handle 22 and the shaving head 8. In the present embodiment the means 18 are made integral with the first coupling means 38 mentioned above. The location of the pivot axis 20 is essential for the present invention since this location defines how a force component 42 resulting from the pressure exerted on the handle by the user is distributed to the skin stretching means 14 and the guard means 28. In accordance with the present invention it is preferred that the force component 42 having the magnitude $2F$ is distributed equally to the skin stretching means 14 and the guard means 28. In the embodiment shown in Fig. 1 this is achieved by providing the pivot axis 20 exactly in the middle between the skin stretching means 14 and the guard means 28. However, in general the optimal position of the pivot axis depends on the friction between the skin 40 and guard means 28, the friction between the skin 40 and the roller 32 as well as the traction of the actively driveable skin stretching means 14. An area that is preferred for arranging the pivot axis 20 will be discussed with reference to Fig. 2.

Fig. 2 is a simplified and schematic depiction of a second embodiment of the shaving head 8 in accordance with the invention. The embodiment shown in Fig. 2 differs from the embodiment of Fig. 1 in that electromotor 36 is associated with the handle 22. Without being limited thereto, this is especially advantageous in cases where the cutting blades 10, 12 are renewed by replacing the whole shaving head 8. The electromotor drives the roller 32 via two drive shafts 44, 46. These drive shafts 44, 46 are coupled by second coupling means 54 which in the present case comprise to engaging gear wheels 48, 50.

Fig. 2 additionally indicates an area 52 which is preferred for arranging the pivot axis 20. As may be seen from Fig. 2, this area 52 in the horizontal direction extends between the middle between the actively driveable skin stretching means 14 and the guard means 28 and the guard means 28 themselves. In the vertical direction the area 52 extends between the upper surface and the lower surface of the shaving head 8. Therefore, in many embodiments of the shaving head 8 in accordance with the invention there is a tendency to locate the pivot axis 20 closer to the guard means 28 than to the skin stretching means 14.

Fig. 3 is a simplified and schematic depiction of a third embodiment of the shaving head 8 in accordance with the invention. The embodiment shown in Fig. 3 differs from

the embodiment of Fig. 1 in that the handle 22 comprises a flexible portion or spring element 24. The spring element 24 is provided to limit the pressure exerted by the user on the shaving head 8.

Fig. 4 is a simplified and schematic depiction of a fourth embodiment of the shaving head 8 in accordance with the invention. The embodiment shown in Fig. 4 differs from the embodiment of Fig. 1 in that the pivot axis 20 is located in front of the cutting blades 10, 12, and in that there is provided a spring element 26 between the handle 22 and the shaving head 8. The pivot axis 22 is arranged in front of the cutting blades 10, 12 to limit the pressure exerted by the user on the cutting blades 10, 12 and the roller 32.

It is to be noted that any reference signs used in the claims shall not be construed as limiting the scope of the invention.

CLAIMS:

1. A shaving head (8) comprising:
 - at least one cutting blade (10, 12) and
 - actively driveable skin stretching means (14) arranged behind said cutting blade (10, 12) relative to a cutting direction (16) of said cutting blade (10, 12),
- 5 characterized by means (18) for providing a pivot axis (20) between the shaving head (8) and a handle (22) attached or attachable to said shaving head (8), said pivot axis (20) being arranged at least essentially parallel to said cutting blade (10, 12).
2. The shaving head (8) according to claim 1, wherein between said shaving head (8)
- 10 and said handle (22), when attached to the shaving head (8), there is provided at least one spring element (24; 26).
3. The shaving head (8) according to claim 1, further comprising guard means (28)
- 15 arranged in front of said cutting blade (10, 12) relative to said cutting direction (16) of said cutting blade (10, 12).
4. The shaving head (8) according to claim 3, wherein said guard means (28) are adapted to perform a hair erecting function.
- 20 5. The shaving head (8) according to claim 3, wherein said guard means (28) are adapted to perform a lubricating function.
6. The shaving head (8) according to claim 3, wherein said guard means (28)
- 25 comprise at least one strip (30) arranged parallel to said cutting blade (10, 12).
7. The shaving head (8) according to claim 3, wherein said pivot axis (20) is arranged such that a force component applied perpendicularly to said cutting direction (16) during a shaving operation is distributed at least essentially in equal parts to said actively driveable skin stretching means (14) and said guard means (28).

8. The shaving head (8) according to claim 3, wherein said pivot axis (20) is arranged closer to said guard means (28) than to said actively driveable skin stretching means (14).
- 5 9. The shaving head (8) according to claim 1, wherein said means for providing a pivot axis (20) parallel to said cutting blade (10, 12) comprise first coupling means (38) for coupling said shaving head (8) to said handle (22).
- 10 10. The shaving head (8) according to claim 1, wherein said actively driveable skin stretching means (14) comprise at least one actively driveable roller (32).
11. The shaving head (8) according to claim 10, wherein the sense of rotation (34) of said roller (32), when active during a shaving operation, corresponds to its reeling sense of rotation (34) relative to said cutting direction (16) and that the rotational speed of the actively driven roller (32) is higher than the rotational speed that would result from the movement of the shaving head (8).
- 15 12. The shaving head (8) according to claim 1, wherein said actively driveable skin stretching means (14) are driven via a movement of the shaving head (8) over skin to be shaved.
- 20 13. The shaving head (8) according to claim 1, wherein said actively driveable skin stretching means (14) are driveable by an electromotor (36).
14. The shaving head (8) according to claim 13, wherein said electromotor (36) is associated with said shaving head (8).
- 25 15. The shaving head (8) according to claim 13, wherein said electromotor (36) is associated with said handle (22).
- 30 16. The shaving head (8) according to claim 15, further comprising second coupling means (54) for coupling said skin stretching element to said electromotor (36).

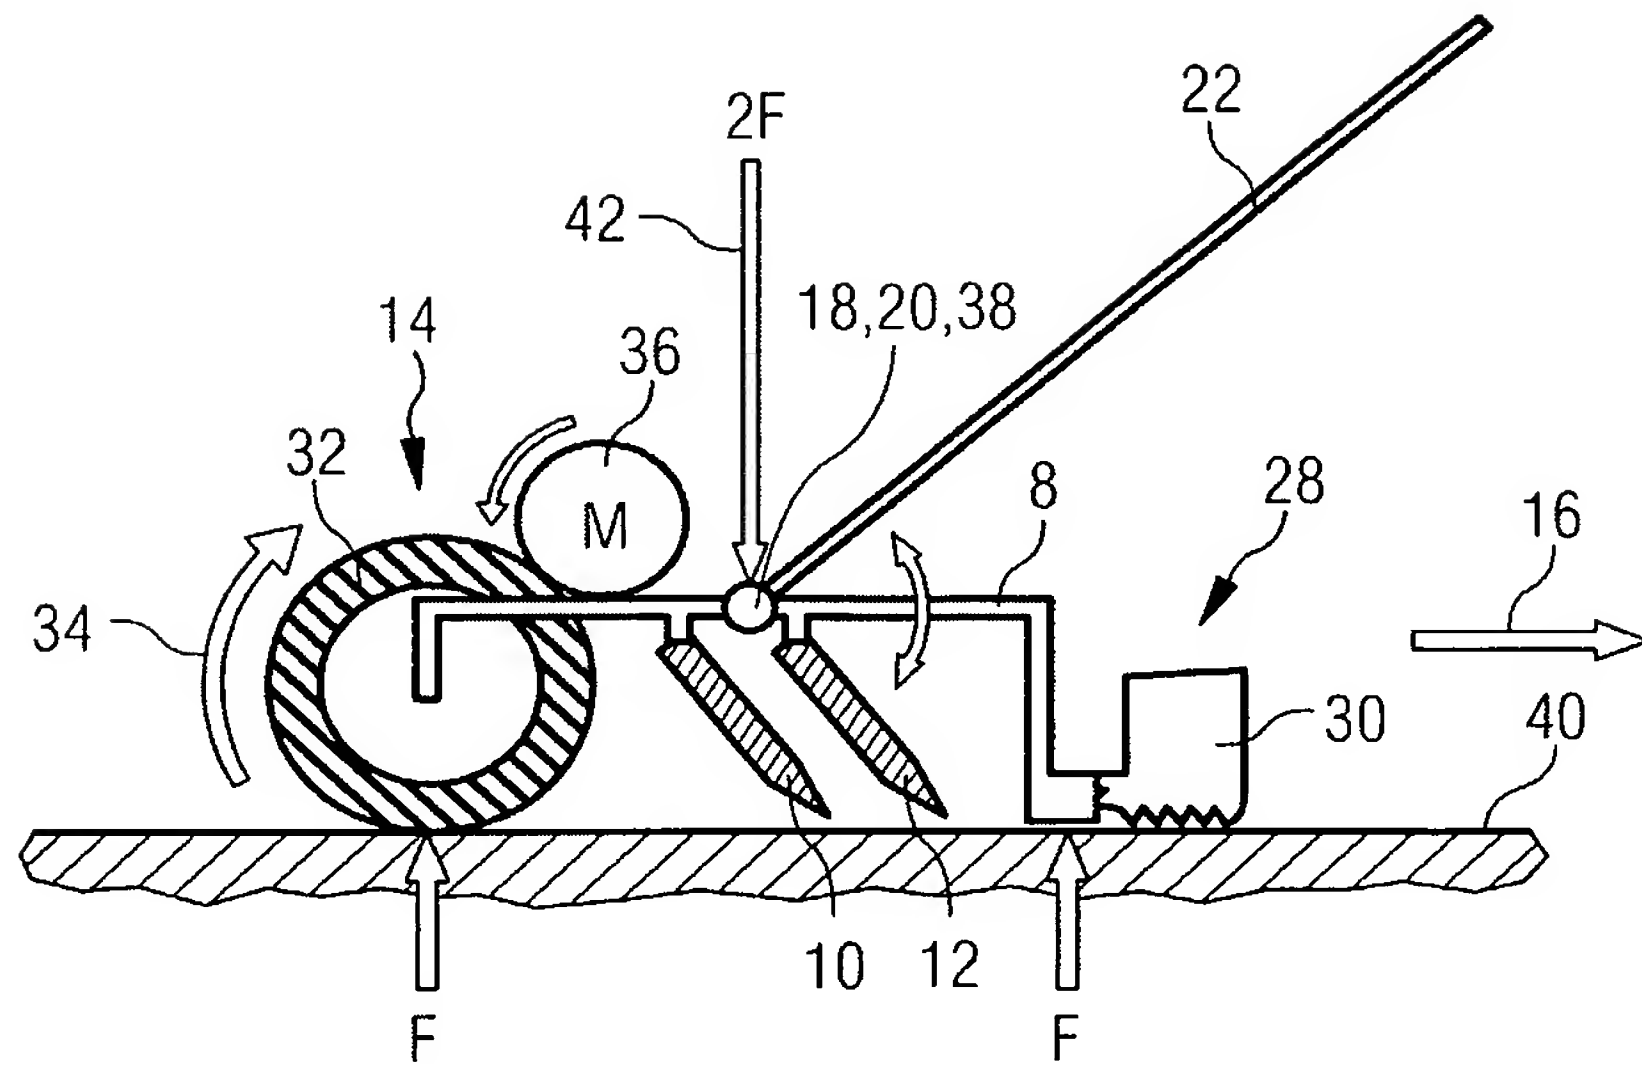


FIG. 1

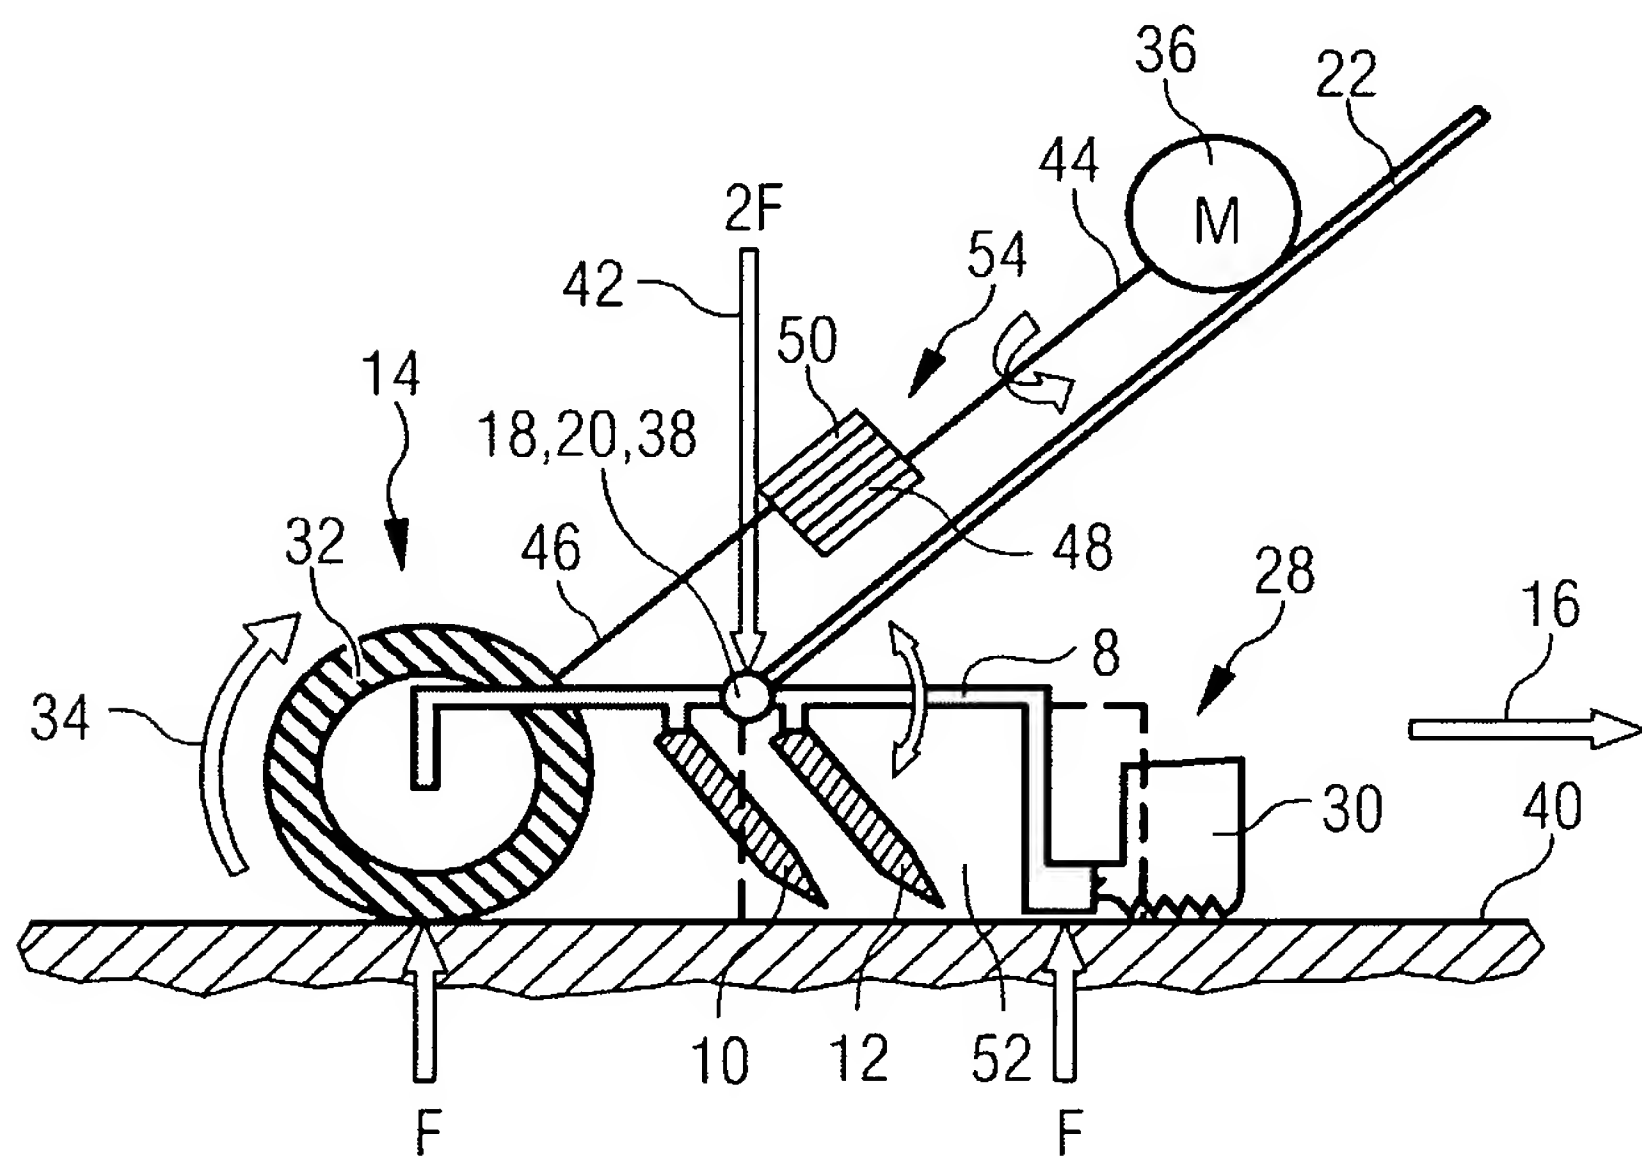


FIG. 2

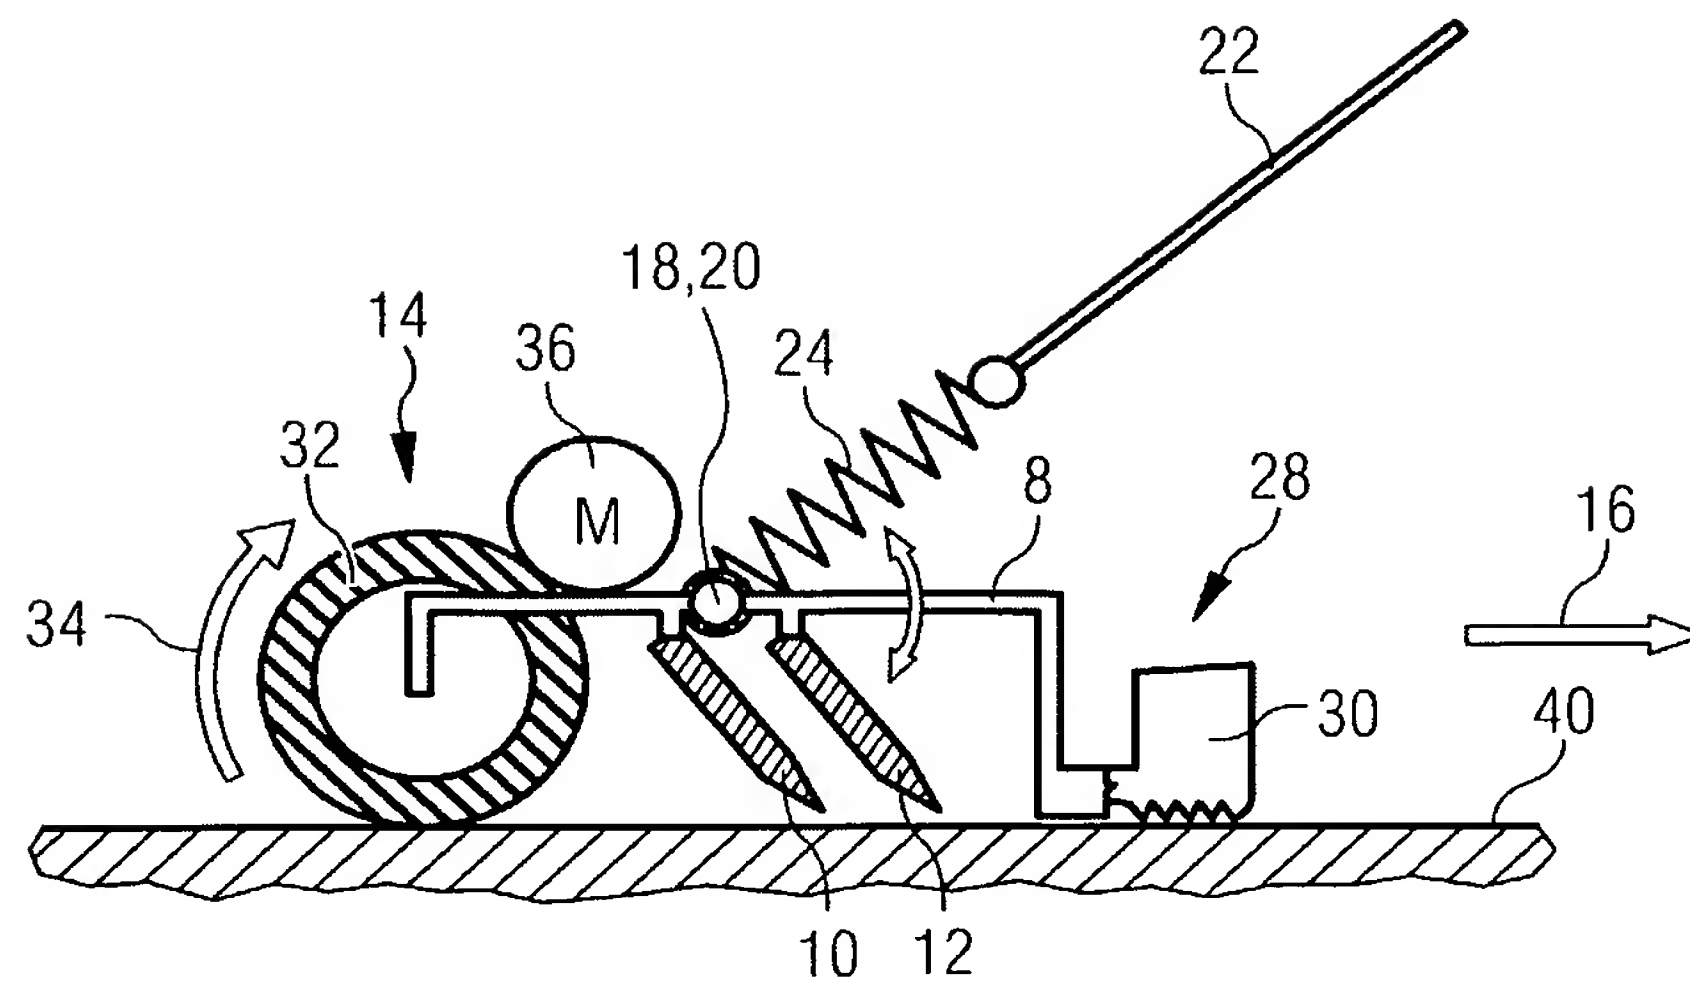


FIG. 3

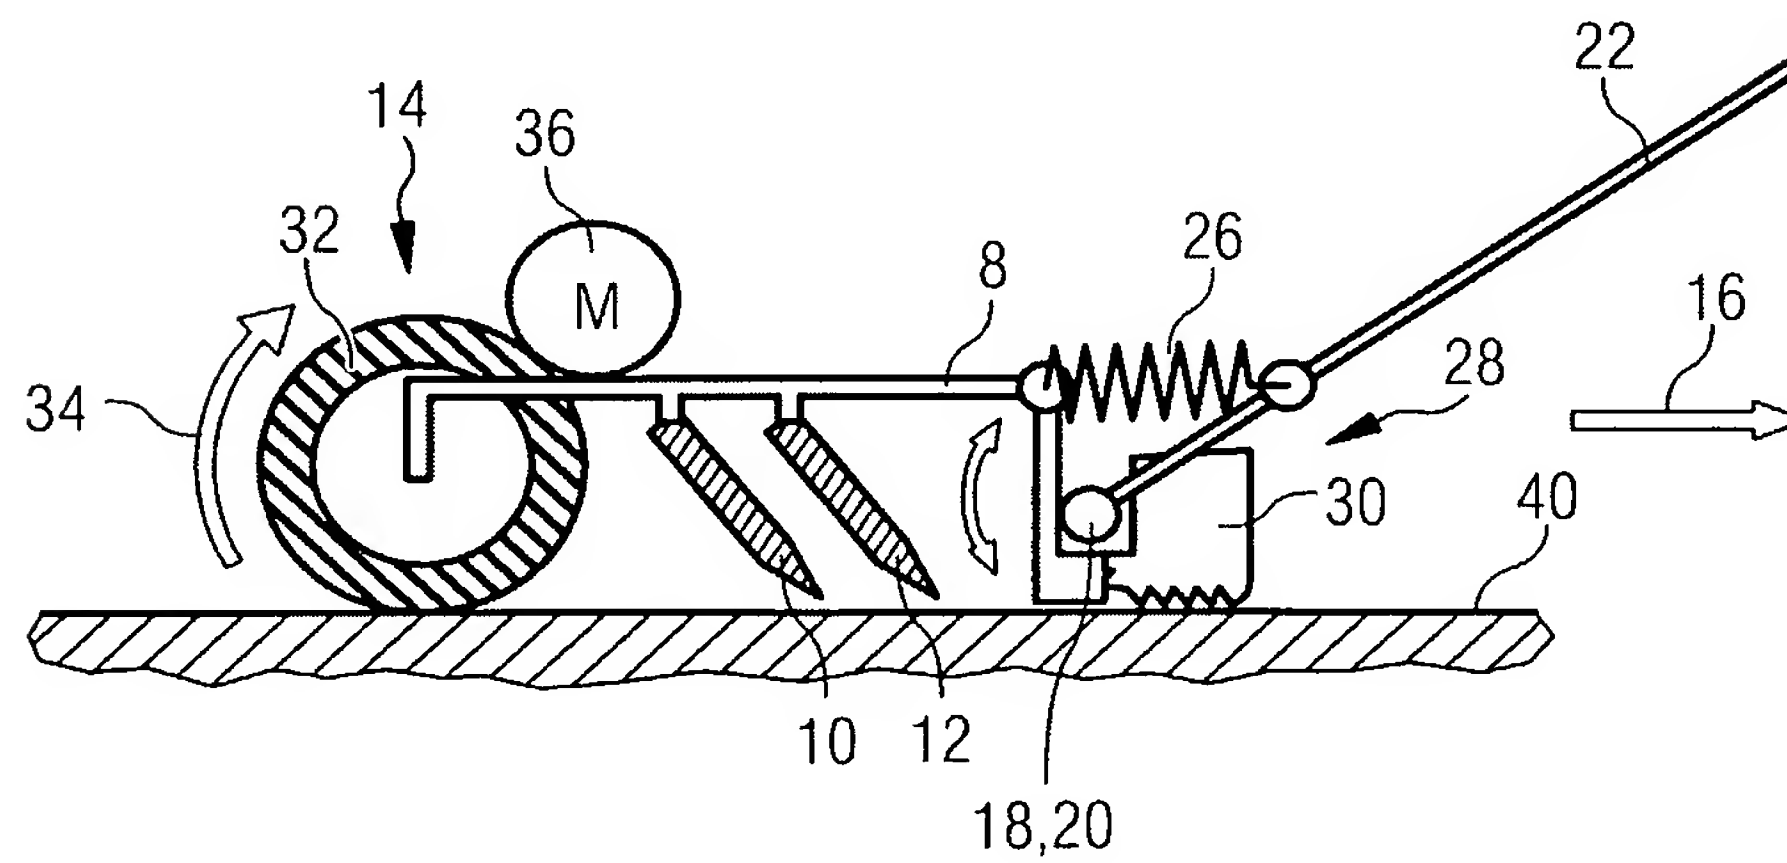


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/052707

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B26B21/34 B26B21/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B26B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 195 14 228 A1 (SIMON, PAL, DR., 31655 STADTHAGEN, DE) 17 October 1996 (1996-10-17) cited in the application column 1, line 64 - column 2, line 17 column 3, lines 8-21; figures 1,2 -----	1-4, 6-13,15, 16
Y	US 5 933 960 A (AVIDOR ET AL) 10 August 1999 (1999-08-10) column 9, line 53 - column 10, line 60 column 10, lines 20-28; figures 2,7,13,16-18 -----	1-4, 6-13,15, 16
A	EP 0 320 626 A (THE GILLETTE COMPANY) 21 June 1989 (1989-06-21) column 2, line 40 - column 3, line 8; figures 1,2 -----	1-4,6
	----- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

14 March 2005

Date of mailing of the international search report

23/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Rattenberger, B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/052707

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01/07212 A (KONINKLIJKE PHILIPS ELECTRONICS N.V) 1 February 2001 (2001-02-01) abstract; figure 1 -----	1
A	DE 10 03 087 B (ALBERTO DE TOBILLAS; ENRIQUE VENTAJAS) 21 February 1957 (1957-02-21) the whole document -----	1

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2004/052707

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19514228	A1	17-10-1996	NONE
US 5933960	A	10-08-1999	AU 8498398 A 22-02-1999 WO 9906190 A1 11-02-1999 AU 4922996 A 04-09-1996 WO 9625276 A1 22-08-1996
EP 0320626	A	21-06-1989	US 4785534 A 22-11-1988 AR 243422 A1 31-08-1993 AT 72536 T 15-02-1992 BR 8806275 A 15-08-1989 CA 1325329 C 21-12-1993 DE 3868391 D1 26-03-1992 EP 0320626 A1 21-06-1989 ES 2029512 T3 16-08-1992 GR 3003906 T3 16-03-1993 JP 1166794 A 30-06-1989 JP 2620348 B2 11-06-1997 MX 165443 B 11-11-1992
WO 0107212	A	01-02-2001	AT 230332 T 15-01-2003 AU 6692700 A 13-02-2001 CN 1319042 A 24-10-2001 DE 60001093 D1 06-02-2003 DE 60001093 T2 11-09-2003 WO 0107212 A2 01-02-2001 EP 1115538 A2 18-07-2001 JP 2003534827 T 25-11-2003
DE 1003087	B	21-02-1957	NONE

PUB-NO: WO2005056251A1
DOCUMENT-IDENTIFIER: WO 2005056251 A1
TITLE: SHAVING HEAD WITH SKIN
STRETCHING MEMBER
PUBN-DATE: June 23, 2005

INVENTOR-INFORMATION:

NAME	COUNTRY
HOUBOLT, ERIK	NL
HAMBURG, MARCO C	NL
HOEXUM, EVERHARDUS J	NL
PAAUW, HENDRIK K	NL
WESSELING, MARK	NL
AKKERMAN, HETTE	NL

ASSIGNEE-INFORMATION:

NAME	COUNTRY
KONINKL PHILIPS ELECTRONICS NV	NL
HOUBOLT ERIK	NL
HAMBURG MARCO C	NL
HOEXUM EVERHARDUS J	NL
PAAUW HENDRIK K	NL
WESSELING MARK	NL
AKKERMAN HETTE	NL

APPL-NO: IB2004052707
APPL-DATE: December 8, 2004

PRIORITY-DATA: EP03104612A (December 10, 2003)

INT-CL (IPC): B26B021/34 , B26B021/22

EUR-CL (EPC): B26B021/22 , B26B021/22 ,
B26B021/34

ABSTRACT:

CHG DATE=20050705 STATUS=O>The invention is directed to a shaving head (8) comprising at least one cutting blade (10, 12) and actively driveable skin stretching means (14) arranged behind said cutting blade (10, 12) relative to a cutting direction (16) of said cutting blade (10, 12). The actively driveable skin stretching means (14) are provided to reduce the possibility that nicks and cuts or irritations of the skin to be shaved are created during the shaving operation. In accordance with the invention the shaving head (8) comprises means (18) for providing a pivot axis (20) between the shaving head (8) and a handle (22) attached or attachable to said shaving head (8), said pivot axis (20) being arranged at least essentially parallel to said cutting blade (10, 12). By providing the pivot axis (20) the force ratio between a force applied to the actively driveable skin stretching means (14) and forces applied to other parts of the shaving head (8) may be kept constant for different angles of the handle. This improves the functioning of the actively driveable skin stretching means (14).